



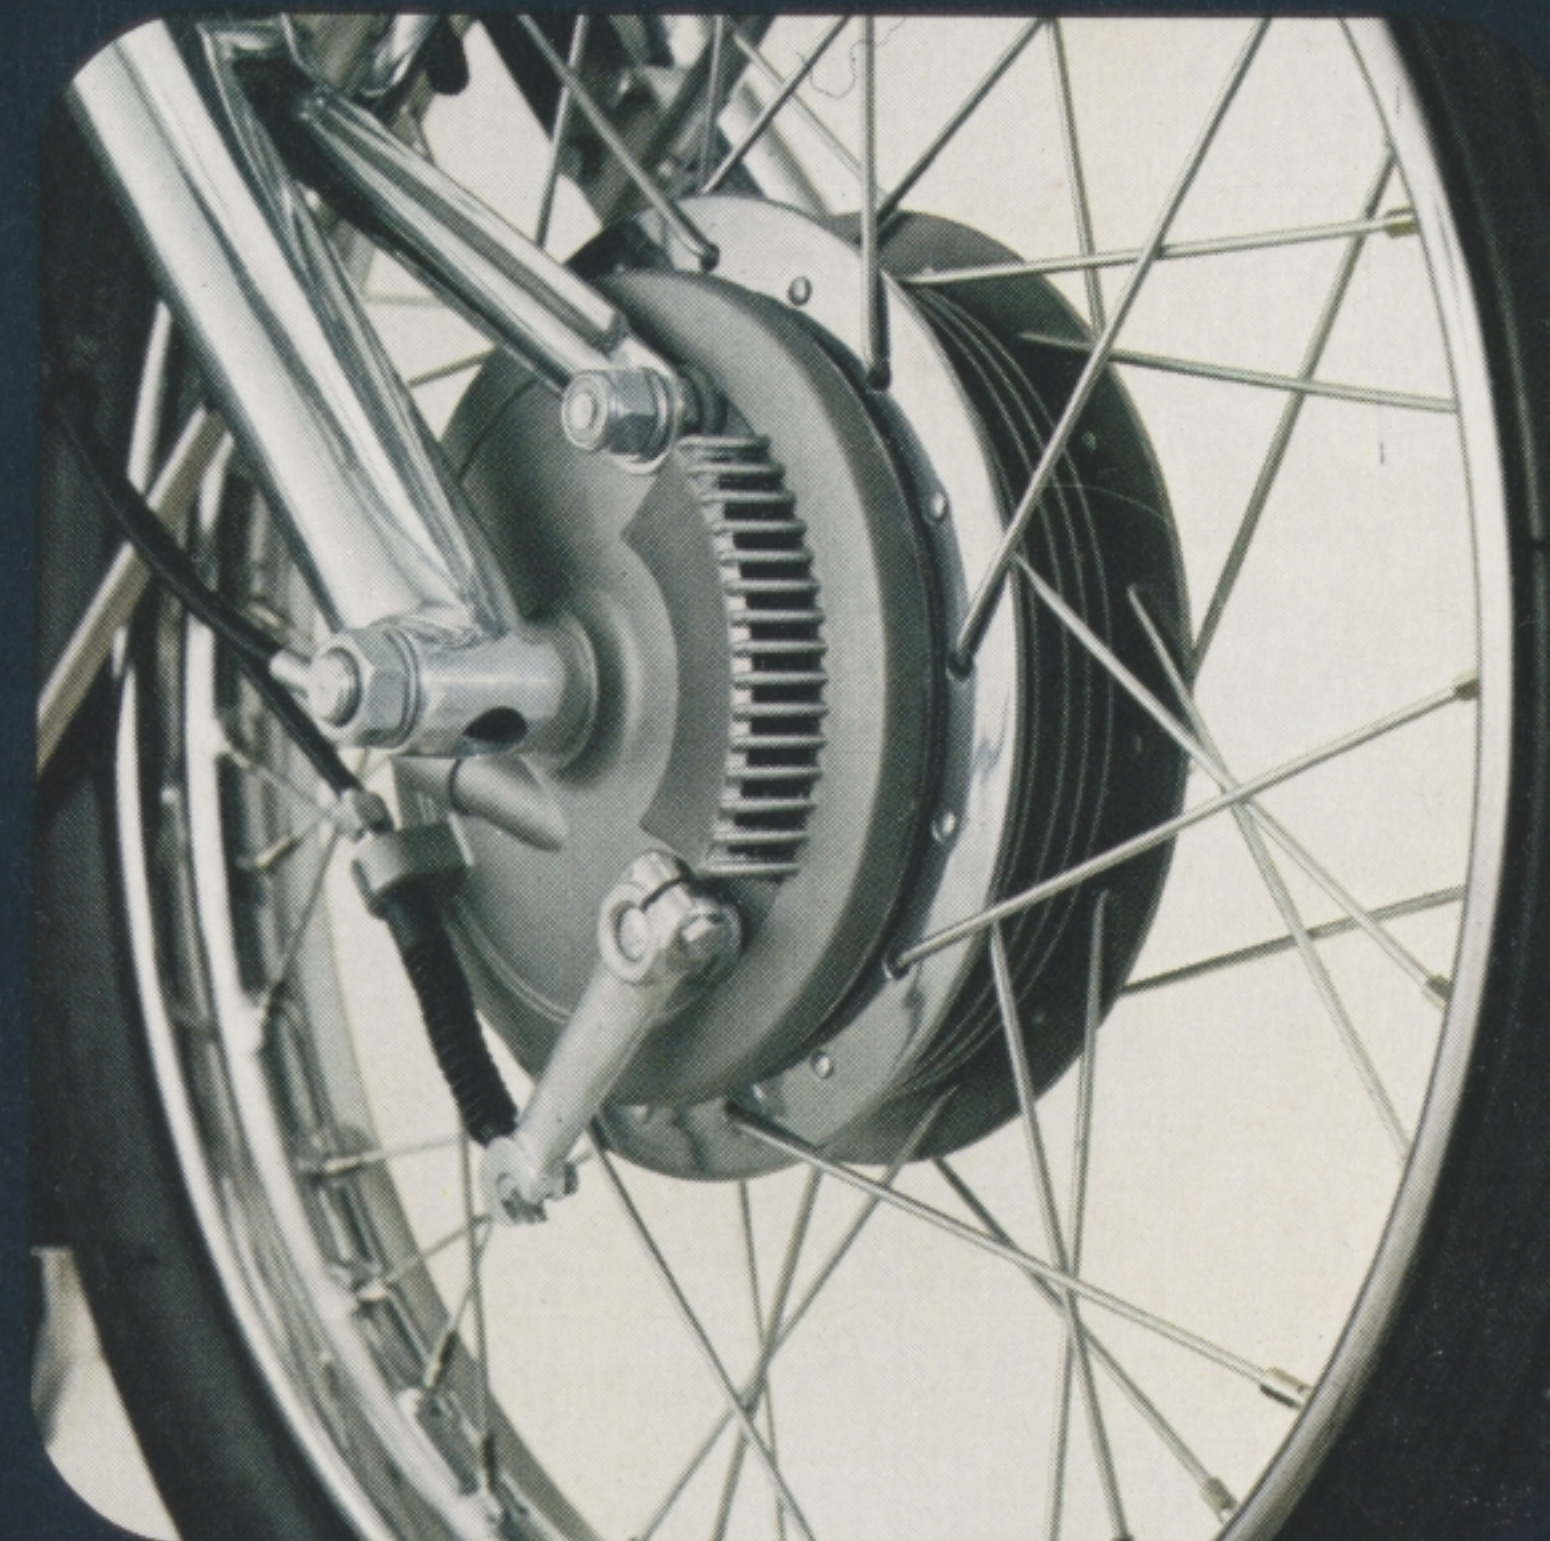

GILERA

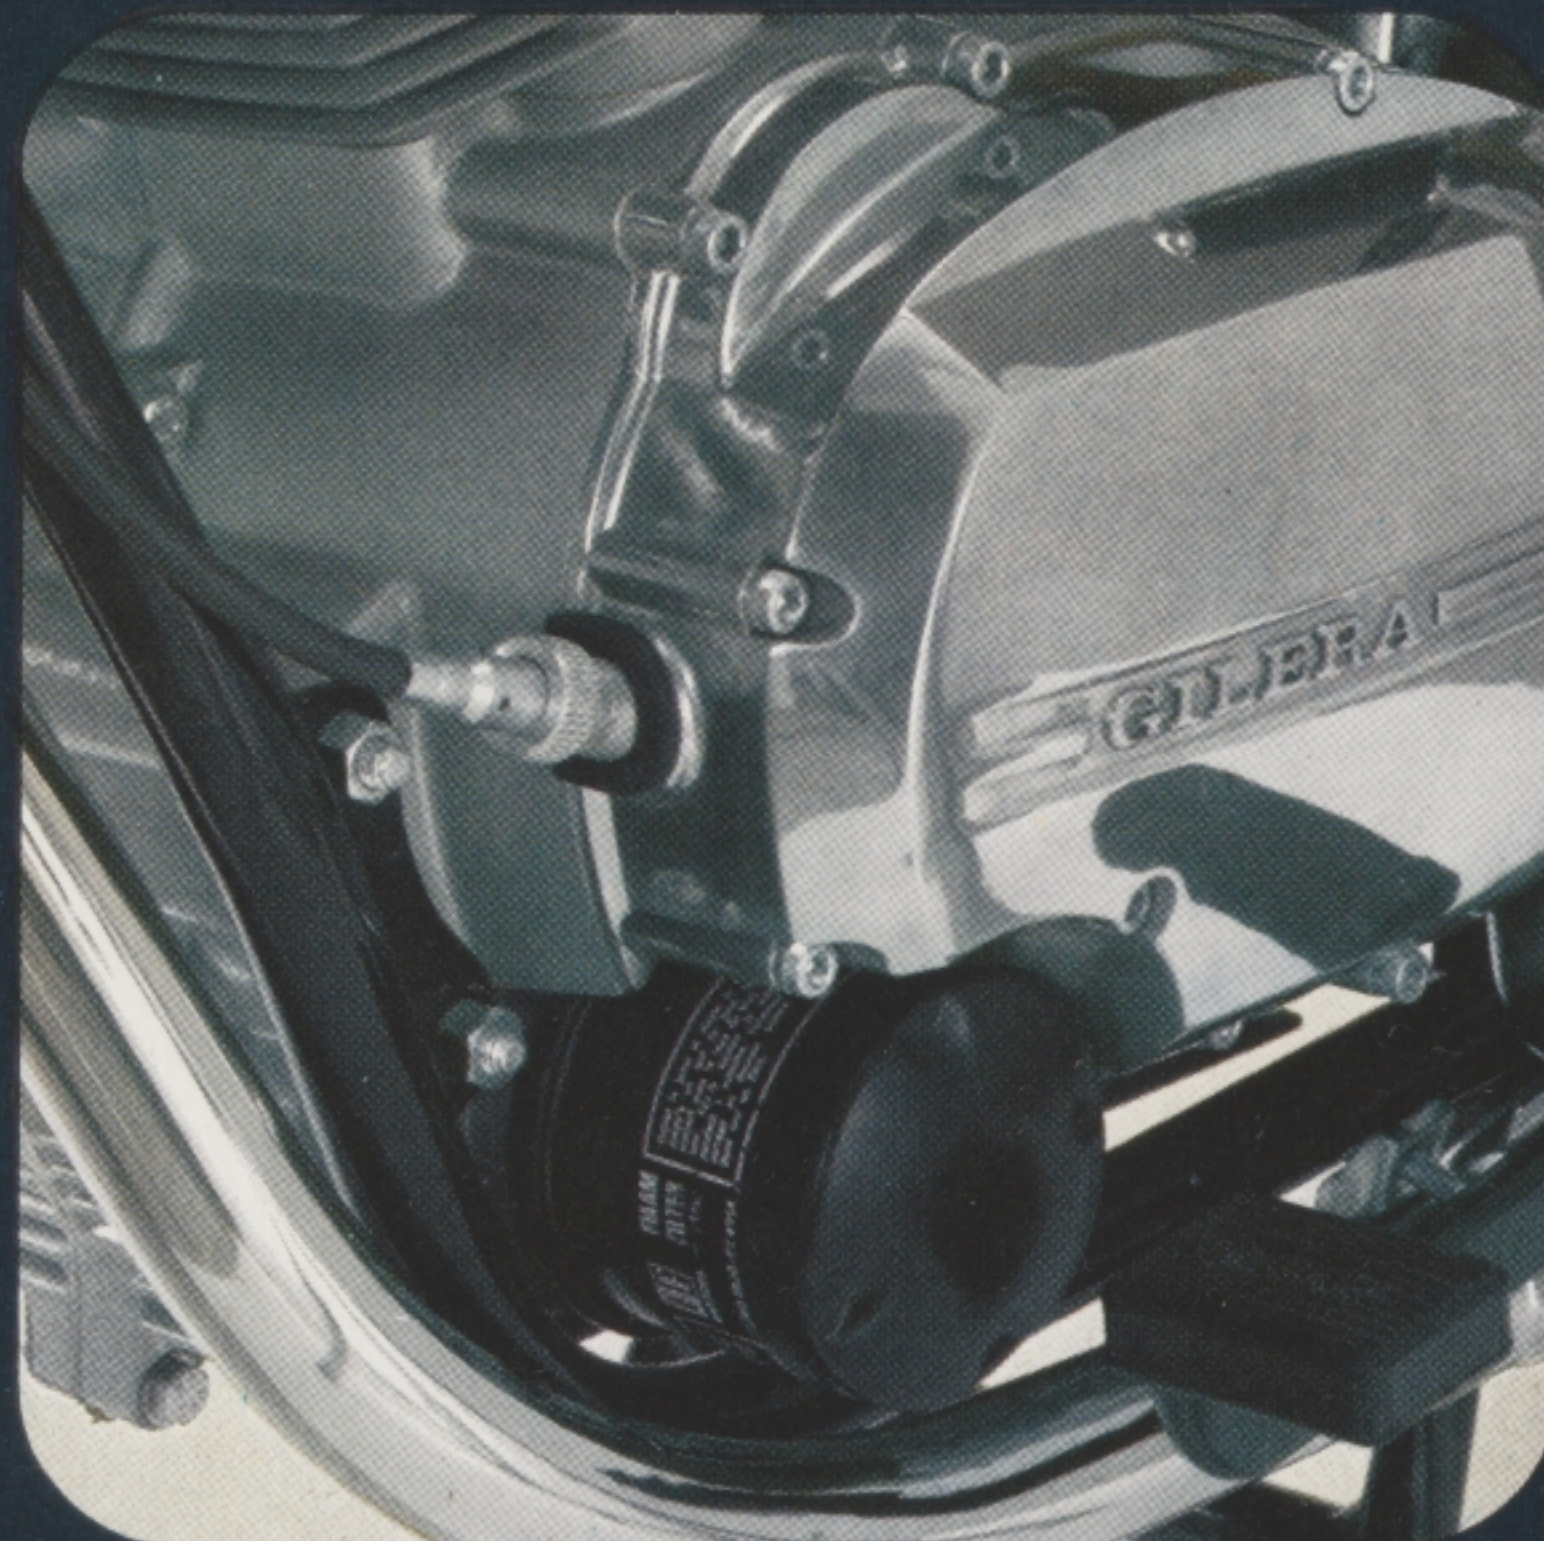

GILERA 150 5V ARCORE

TECHNICAL SPECIFICATIONS

Engine:—Single Cylinder 4 Stroke O.H.V. — 152.6 cmc. displacement — Bore x Stroke: 60 x 54 mm. Compression ratio 1:10 — Maximum Power 14.5 HP DIN at 8,250 r.p.m. **GearBox:**—5 Speeds — With Foot Gear-change. **Transmission:**—By Helicoidal Gears — Multiplate clutch in oil bath — Primary Transmission by Gear — Secondary Transmission by Chain. **Ignition** With Flywheel Magneto. **Lubrication:**— Pressure Fed. Oil in Crankcase 52 fl. ozs. **Carburettor:**— Dell'Orto VHB 24 BS Central Float Chamber. **Lighting System:**—6 Volt — Flywheel and Battery. **Brakes:**— Mechanical. Front

160 x 30 mm. Rear 140 x 25 mm. **Frame:**—Reinforced Steel Pipe Double, Cradle Type. **Suspension:**—Front Telescopic Fork with shock absorbers. Rear—Swinging arm with shock absorbers. **Dimension and Weight:**— maximum length 1,940mm, maximum width 750 mm, maximum height 1,060 mm. Wheelbase 1,280 mm. Weight (dry) 117 kg **TYRES:**—Front— 2.75 x 18" ribbed. Rear—3.00 x 18". **Petrol:**—Super Fuel. **Petrol Tank Capacity:**—2¼ imp. gallons. **Fuel Tank Range:**—395 km. **Consumption:**— 165 km. per gallon. **Maximum Speed:**—120 km. per hour. **Maximum Gradient:**—40%

QUEENSLAND IMPORTER AND DISTRIBUTOR:—

MOTOR SCOOTERS PTY. LTD.

845 ANN STREET, FORTITUDE VALLEY, 4006 — TELEPHONE: 52 5688

